


SBE/SFR Specifications

Stainless

Walsted Truck A/S

Flexible solutions

Model		SBE/SFR 1000	SBE/SFR 1500	
Capacity	Q load	kg	1000	1500
Loadcentre	C distance	mm	600	600
Power type	Elektric (battery)	Battery	Battery	
Control type		Standing	Standing	
Tire equipment	V=Solid tire	Front/rear	V/V	V/V
Wheels (x=Driven)	Number	Front/rear	4/(1x)1	4/(1x)1
Forktype		Permanent	Permanent	
Fork dimensions	S Thickness	mm	90	90
(Standard)	F Fork width	mm	180	180
	L3 Fork length	mm	1200	1200
	L2 Length to face of forks	mm	880	880
Overall dimensions	L Length truck	mm	2080	2080
	h Truck height	mm	2265	2265
	B Width	mm	880	880
	B3 Width external forks	mm	555	555
Turning radius	Wa	mm	1756	1756
Aisle width	AST For pallet 800 x 1200	mm	2150	2150
Speeds	Driving speed without/with load	km/h	8,5/7,5	8,5/7,5
	Lift speed without/with load	m/sek.	0,3/0,18	0,3/0,16
	Lowering speed without/with load	sek.	Infinitely variable	Infinitely variable
Gradeability	Without/with load	%	12/8	12/8
Weight	Without. battery	kg	1180	1180
Axle loading	With load front/rear	kg	1380/866	1850/900
Wheel size	Front	mm	ø85x65	ø85x65
	Rear	mm	ø300x90/ ø125x100	ø300x90/ ø125x100
Wheel base	y	mm	1450	1450
Tread	Centre tire front/rear	mm	375/565	375/565
Ground clearance	With load	mm	30	30
Brakes	Foot pedal brake		Elektro- magnetic	Elektro- magnetic
	Parking brake		Elektro- magnetic	Elektro- magnetic
Battery	Type		Rinforced	Rinforced
	V/Ah		24/189-270	24/189-270
	Weight	kg	215-252	215-252
Electric motor	Drive motor power/S2 min.	KW/min.	2,1/60	2,1/60
	Pump motor power/S3	KW/%.	3/20	3/8
Speed control	Type, turn - pedal		Turn	Turn
	Number of speed		Infinitely variable	Infinitely variable
Transmission	Type		Gears	Gears
Equipment	Max pressure	atm	90	130

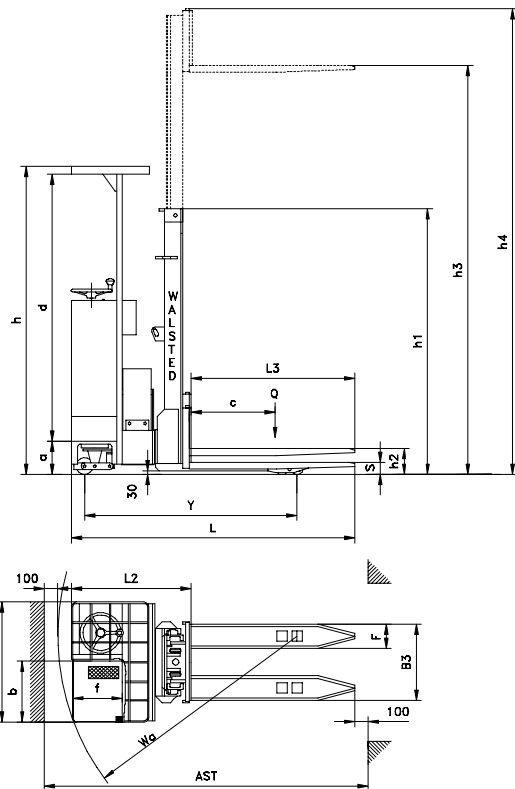

These specifications are for truck with duplexmast.
This specifications are subject to change without notice.

Driver's stand	a mm	b mm	d mm	f mm	
	260	440	1935	360	
Standard lift heights with simplex mast					
h3 lift height	h4 mast height	h1 mast height	h2 free lift	SBE/SFR 1000	SBE/SFR 1500
mm	mm	mm	mm	Capacity kg	Capacity kg
2000	2415	2380	1965	1000	1500
Standard lift heights with duplex mast					
3500	3950	2200	190	800	800
3000	3450	1950	190	1000	1000
2500	2950	1700	190	1000	1500
2000	2450	1450	190	1000	1500

Can be delivered with special lift heights.