

SBE/SR 90 Specifications

Walsted Truck A/S


Stainless steel

Flexible solutions

Type			SBE/SR 90
Capacity	Q Load , Loadcenter 600 mm	kg	1500
Power type	Electric (battery)		Battery
Type of steering	Electric power steering		
Fork wheels	Numbers / type P = Polyurethane		(4x) P
Driving wheels	Numbers / type V = Vulkollan		(2x) V
Turning radius	Wa (without platform)	mm	1561
Turning radius	Wa (with platform)	mm	2001
Aisle width	AST with pallet 800 x 1200 (without platform)	mm	2253
Aisle width	AST with pallet 800 x 1200 (with platform)	mm	2693
Speed	Driving speed without/with load	km/h	6/5,4- (11,5/8,5**)
Grade ability	Without/with load	%	10/10
Weight	Without battery	kg	950
Brakes	Type		Electric
Battery	Acid, stainless steel box, 265 kg	V/Ah	24/344
	GEL, stainless steel box, 250 kg	V/Ah	24/284
	Lithium-Ion, stainless steel box, 265 kg	V/Ah	24/200
Electric motor	Drive motor power/S2 min.	KW/min.	2x1,5/60
	Pump motor power/S3	KW/%.	3/-
Speed control	Type		Step less
Lifting / lowering control	Electric		Step less

** With side-guards

Masttype	h = Building height, mast (mm)	h1 = lift (mm)	h2 = Building height by max lift (mm)	Free lift (mm)	Capacity by 600mm L/C (kg)
Simplex	2370	2000	2395	1975	1500
Duplex	2210	3500	3895	186	1000
	1960	3000	3395	186	1250
	1710	2500	2895	186	1500
	1460	2000	2395	186	1500

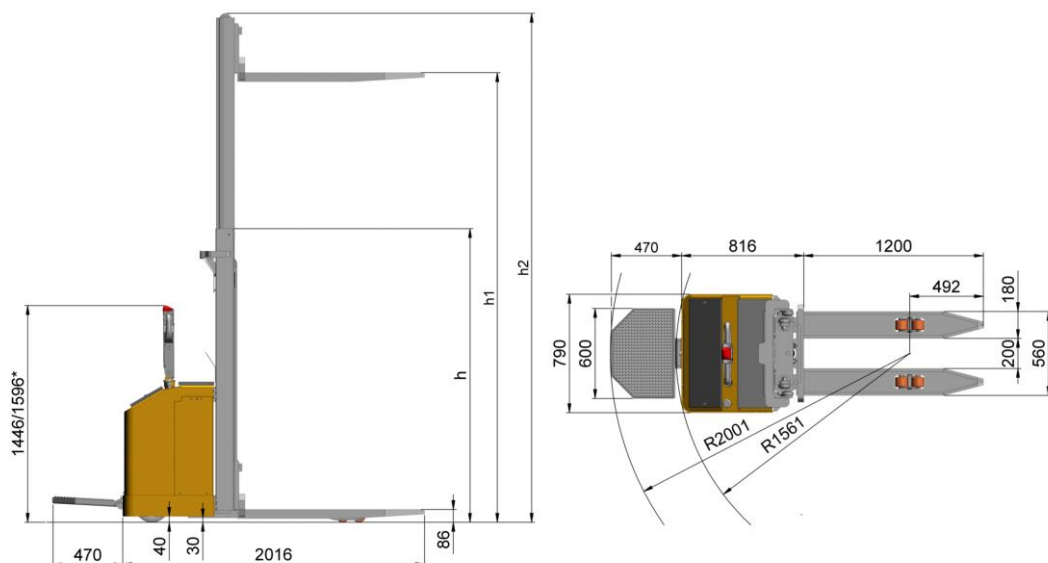

These specifications are subject to change without notice

*without platform